ELETTRONICI / *ELECTRONIC*

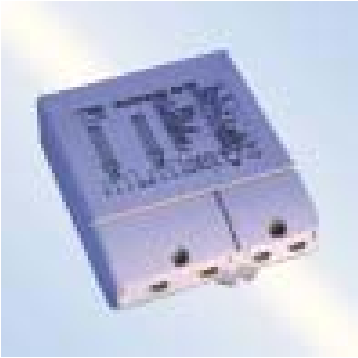

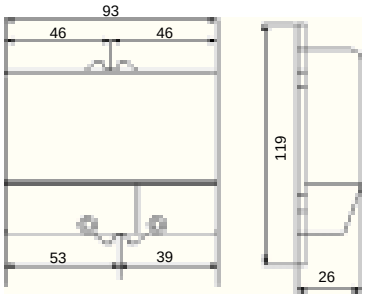

FIG. 19

Caratteristiche Generali
Alimentatore indipendente
Bilampada
Elevato fattore di potenza
Accensione immediata della lampada con preriscaldo dei catodi
Morsetto a vite
Assenza di effetto stroboscopico e sfarfallio
Risparmio energetico fino al 25% rispetto a un reattore convenzionale
Aumento della vita della lampada fino al 50% in piu' rispetto a un reattore convenzionale
Conforme alle normative: sicurezza EN 60928
EMC EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547
Adatto per superfici altamente infiammabili

General Data
Independent ballast
Twin lamps
High power factor
Instant warm start
Screw terminal block
No flicker or stroboscopic effect
Energy saving up to 25 % in comparison with a traditional ballast
Lamp life increased by up to 50%
According to normatives: security EN 60928
EMC EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547
Low housing temperature



SERIE 150

Potenza *Power* W	Codice *Code*	Tensione ingresso *Input Voltage* V	Variazione tensione *Range Voltage* AC	Corrente ingresso *Input Current* mA	Fattore Potenza *Power Factor*	Potenza assor. *Input power* W.	Dimens. *Size*	Confez. *Packaging* Pz.	Peso *Weight* Kg.	Lampade *Lamps*	Schema *Wiring*
9-10-11-13	150010	220/240	207/254	90/113	± 0,90	20/26	FIG.19	5	0,2	FCE FCE-6 FCPE 2DE	12
18	150011	220/240	207/254	160/168	± 0,90	37/38	FIG.19	5	0,2		
26	150012	220/240	207/254	228/235	± 0,90	52/54	FIG.19	5	0,2		

TENSIONE INGRESSO CC[1]=176/254 ACCENSIONE LAMPADA = MAX 1s FREQUENZA INGRESSO Hz= 50/60 FREQUENZA FUNZIONE KHz =± 40
MARCHI APPROVATI VDE TEMPERATURA FUNZIONAMENTO °C = -15/+50
INPUT VOLTAGE RANGE CC[1]=176/254 STARTING TIME = MAX 1s INPUT FREQUENCY Hz= 50/60 OPERATING FREQUENCY KHz =± 40
MARKS VDE OPERATING TEMPERATURE °C = -15/+50